

COMPACT PCI

2.00mm CENTERLINE



SPECIFICATIONS

Material:


Insulator: PBT, glass reinforced thermoplastic, rated UL 94V-0
Contacts: Phosphor Bronze

Plating:

5 µin gold over 50 µin nickel underplate on contact area and 100 µin tin-lead on solder-tails

Electrical:

Operation voltage: 500 VAC max
Current rating: 1 Amp max
Contact resistance: 20 mΩ max
Insulation resistance: 1000 MΩ min @ 1000 VDC between adjacent contacts (75°F and 50% R.H.)
Dielectric withstanding voltage: 1000 VDC min rms (sea level)




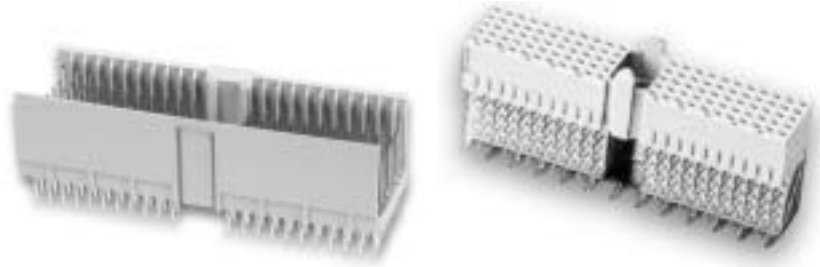


ORDERING INFORMATION


choose one from each category as shown in sample below

2CP	HV	A	95	09	Options
Series	Body Type	Type	No. Of Contacts	Mating / Tail Length	
2CP - 2mm Compact PCI	HV - Header Vertical SR - Socket Right Angle	A, B19, B22, B25, C, AB19, AB22, AB25	55, 95, 110, 125, 77, 154, 133, 175	01 - 8.2/3.7 02 - 9.7/3.7 03 - 11.2/3.7 04 - 8.2/4.5 05 - 9.7/4.5 06 - 11.2/4.5 07 - 8.2/13.0 08 - 9.7/13.0 09 - 11.2/13.0 10 - 8.2/14.5 11 - 9.7/14.5 12 - 11.2/14.5 13 - 8.2/16.0 14 - 9.7/16.0 15 - 8.2/13.0 16 - 11.1/16.0	15 - 15 µin gold plating on contact area 30 - 30 µin gold plating on contact area

PIN LENGTH DESIGNATOR CHARTS

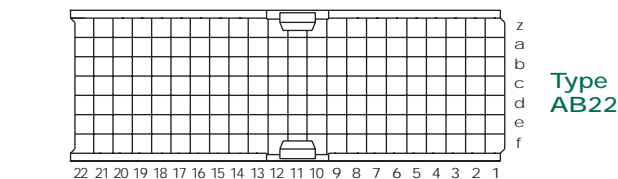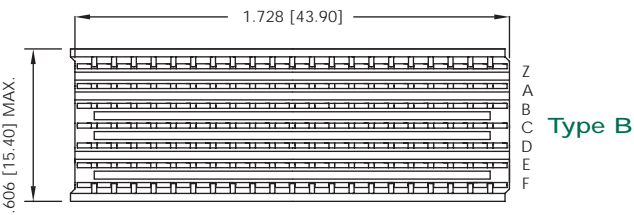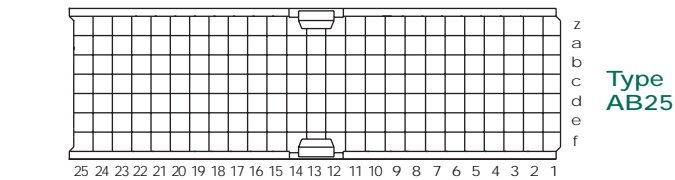
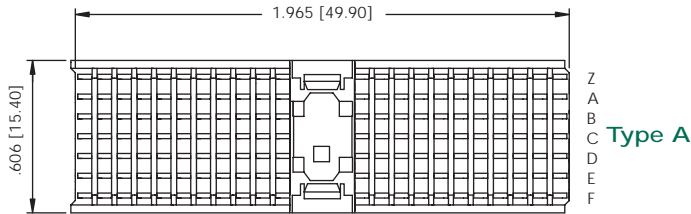


Charts for Customer Use to Designate Pin Lengths

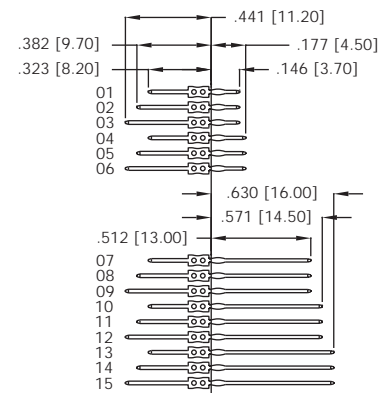

SEATING PLANE FOR CONNECTOR





CONTACT DIMENSIONS

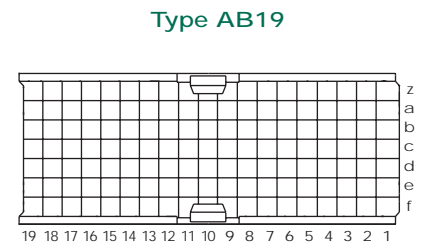





COMPACT PCI

2.00mm CENTERLINE





2CP - HV - A - 154

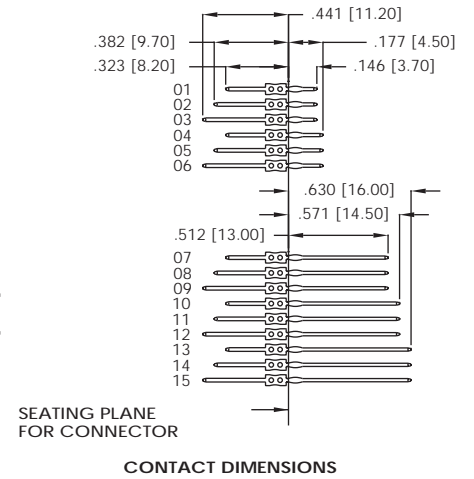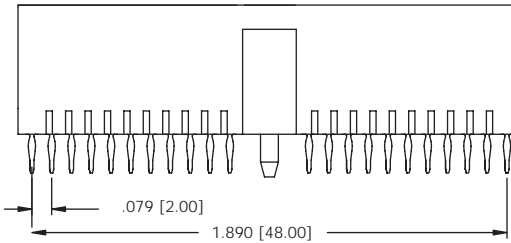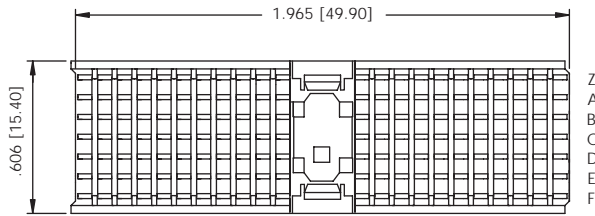

2CP - HV - C - 77

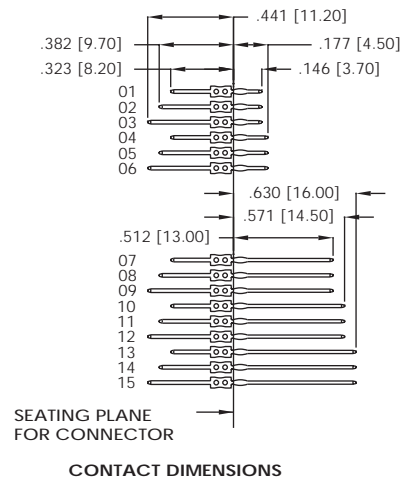





2CP - HV - B22 - 154

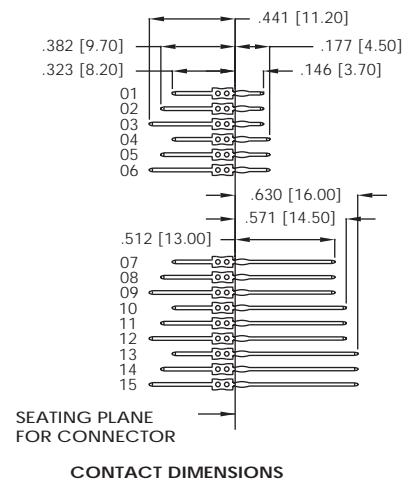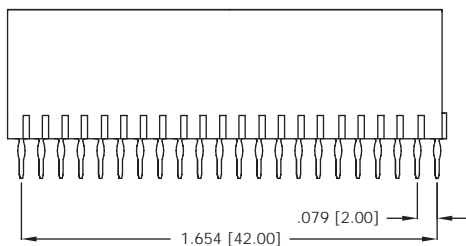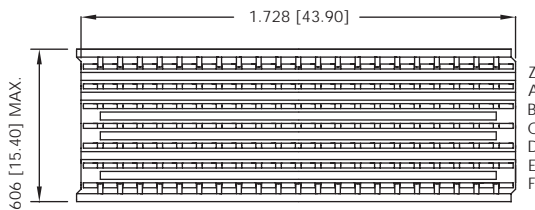

COMPACT PCI





2.00mm CENTERLINE

2CP - HV - AB19 - 133

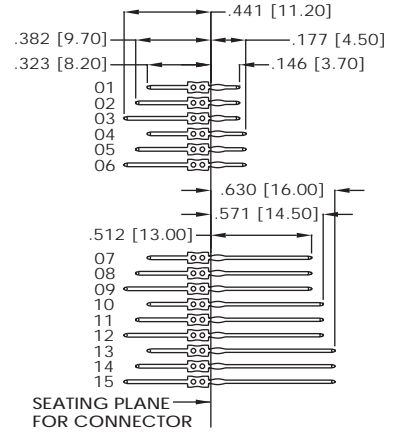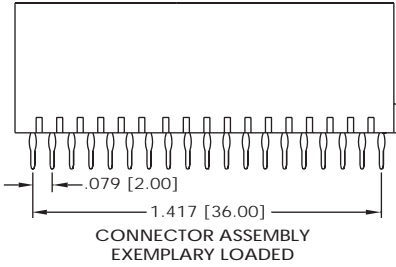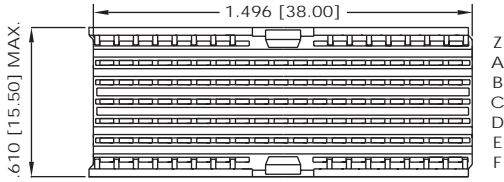





CONTACT DIMENSIONS

2CP - HV - AB22 - 154

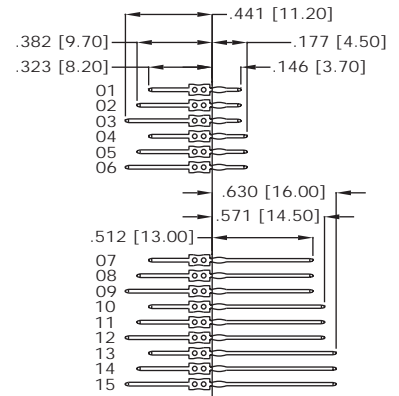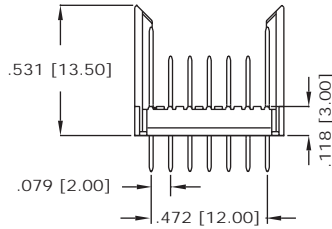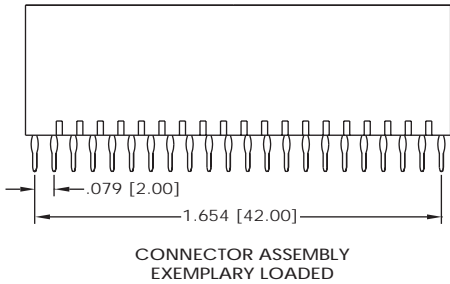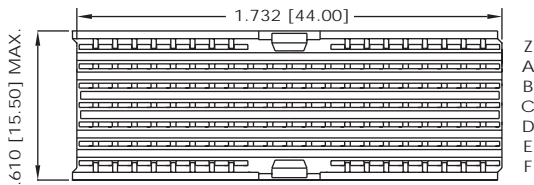

CONTACT DIMENSIONS

2CP - HV - AB25 - 175

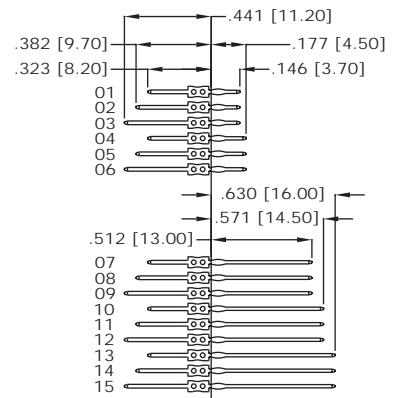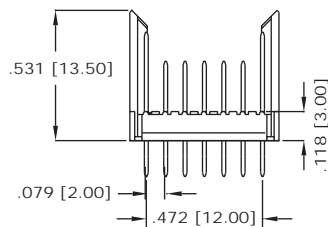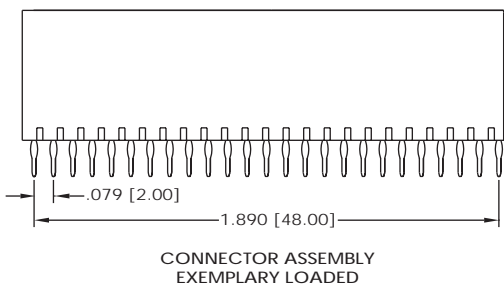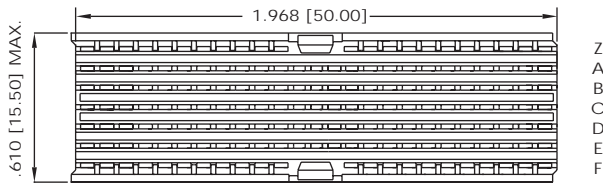


CONTACT DIMENSIONS


COMPACT PCI

2.00mm CENTERLINE


2CP - SR - B25 - 125

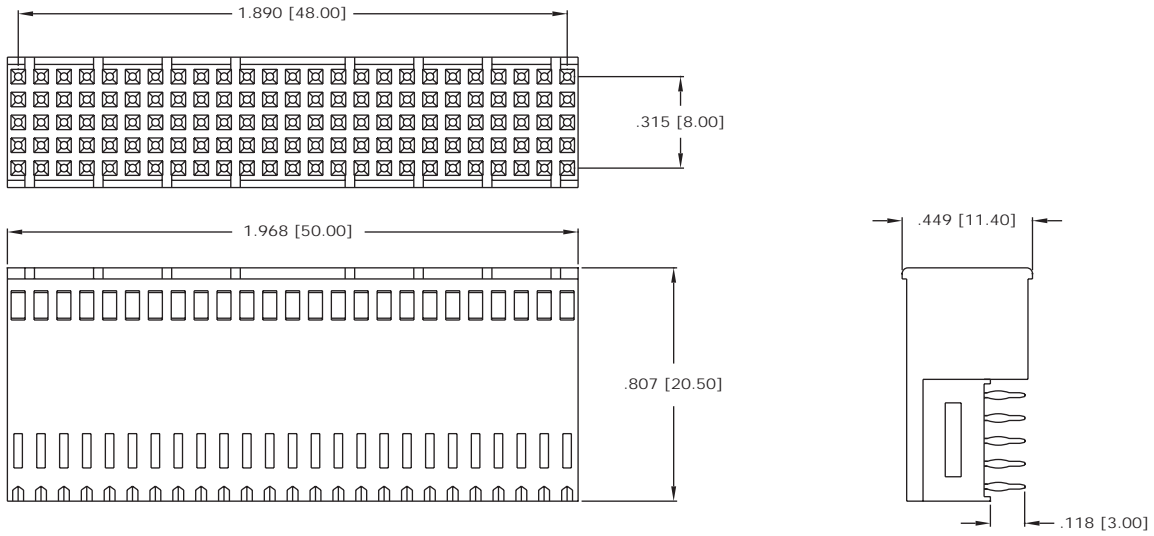

2CP - SR - A - 110

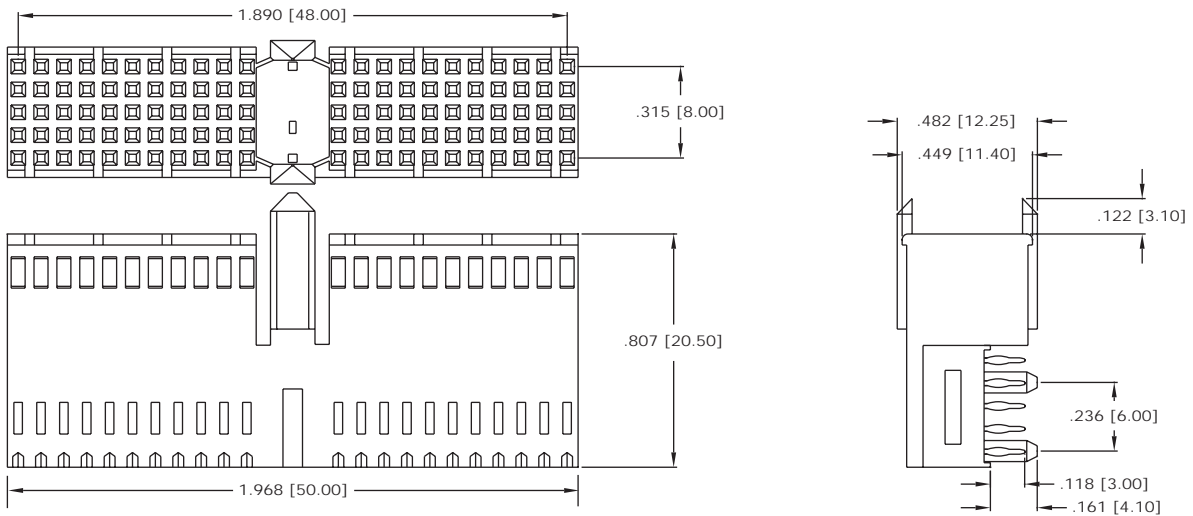

2CP - SR - C - 55

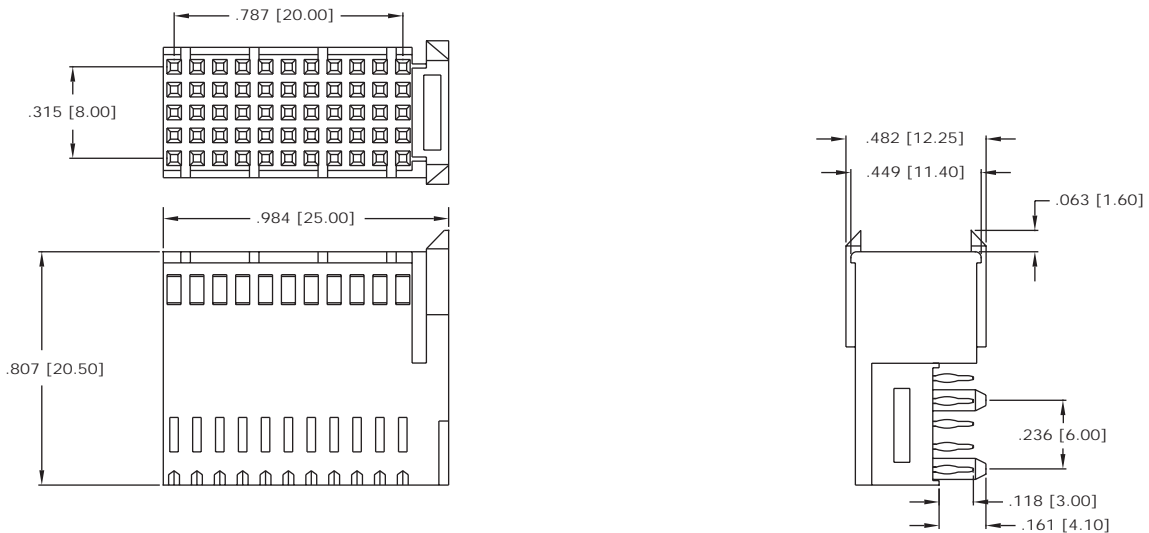


COMPACT PCI


2.00mm CENTERLINE



2CP - SR - AB19 - 95

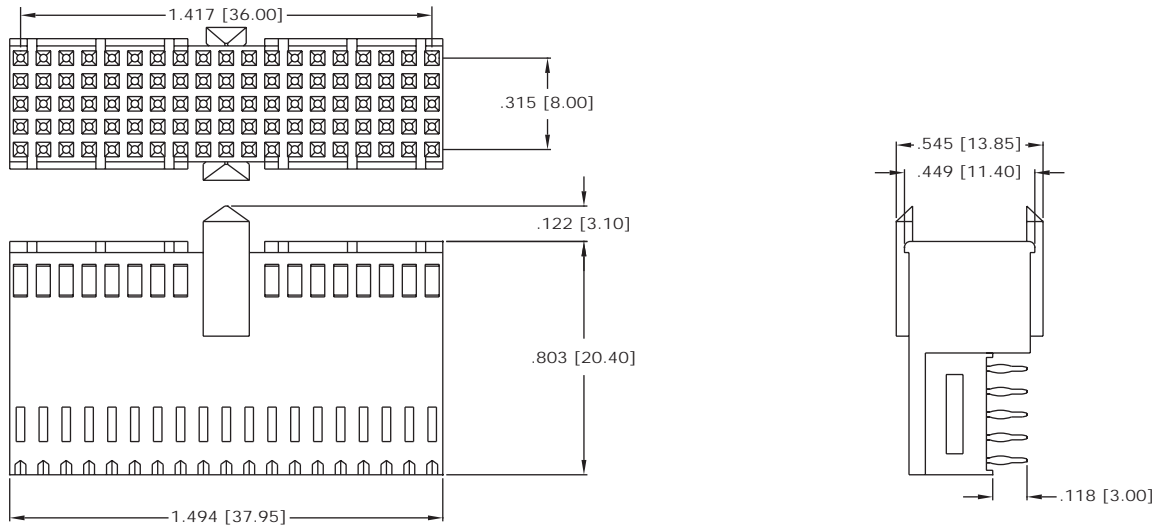

2CP - SR - AB22 - 110

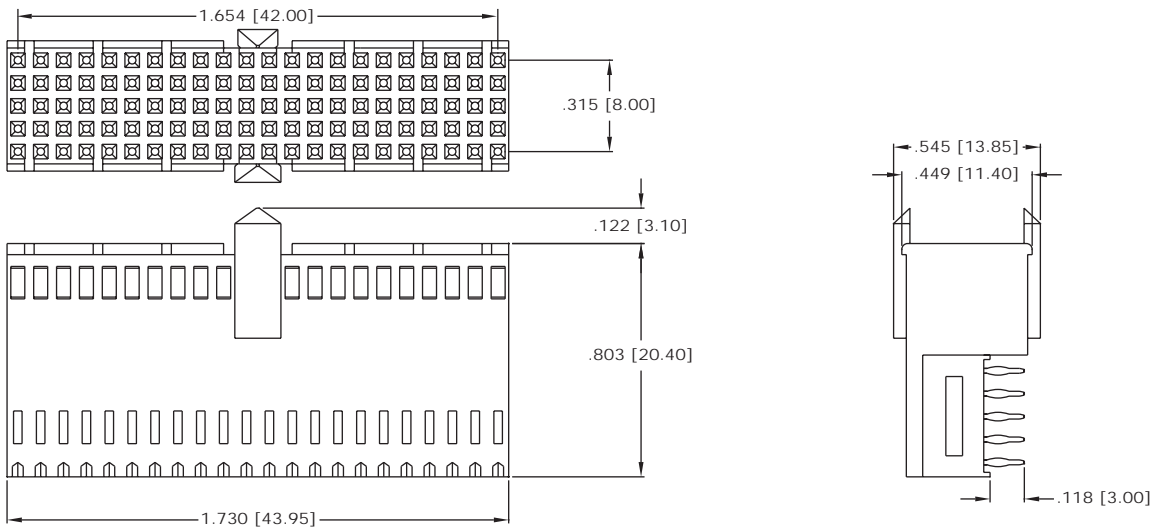

2CP - SR - AB25 - 125

