

LOCKING PIN HEADER

.100" [2.54] CENTERLINE HEADER WITH LOCK FEATURE



SPECIFICATIONS

Material:


Insulator: Nylon 6/6 thermoplastic, rated UL 94V-0
Color: Natural
Contacts: Phosphor Bronze

Plating:

100 µin tin-lead over 50 µin copper underplate

Electrical:

Operation voltage: 250 VAC max
Current rating: 3 Amp max
Contact resistance: 15 mΩ max
Insulation resistance: 1000 MΩ min @ 500 VDC between adjacent contacts (75°F and 50% R.H.)
Dielectric withstanding voltage: 1000 VDC min rms (sea level)

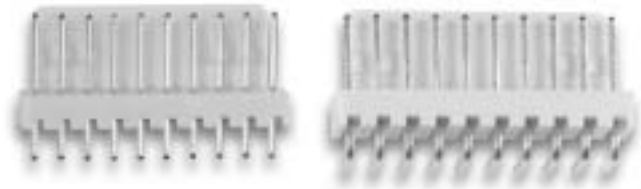


ORDERING INFORMATION


choose one from each category as shown in sample below

| LHJ Series | 10 Positions | S Mounting Angle |
|------------------------------------|--------------|-------------------------|
| LHJ - .100" Locking Pin Header | 02 thru 20 | S - Straight |
| CHJ - .100" Crimp Contact Housing | | R - Right Angle |
| CHJ-C-X - Crimp Contact 28-22 awg. | | H - Reverse Right Angle |


LHJ - XX - S

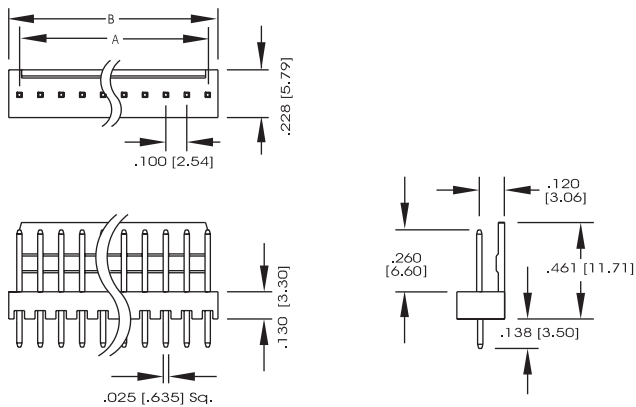

LHJ - XX - H

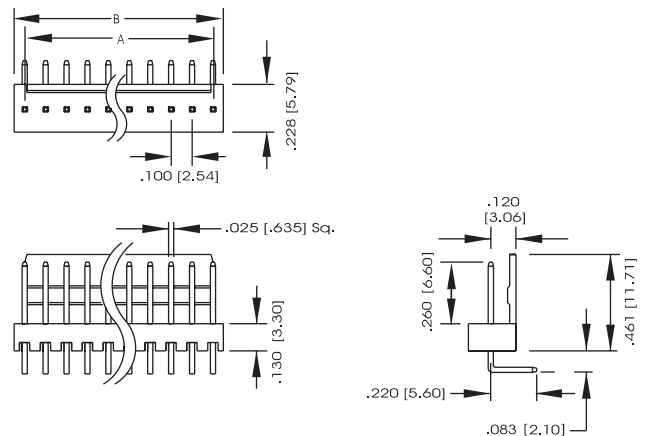

LHJ - XX - R

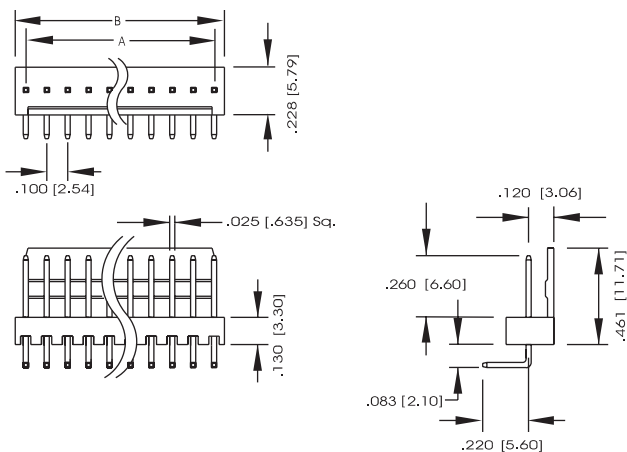

CHJ - XX

